



- **Separation without the need for tools***
into 3 components,
space-saving storage/transport

Universal motor

powerful, robust,
high torque

Protective grating*

easy and safe pouring into
bucket

Safety switch


cut-off in case of opening the
protective grating – protection
of the user

Draught-bar

Integrated transport cart
with draught-bar – mobile use of
the bucket

Transport rollers

for mobile use

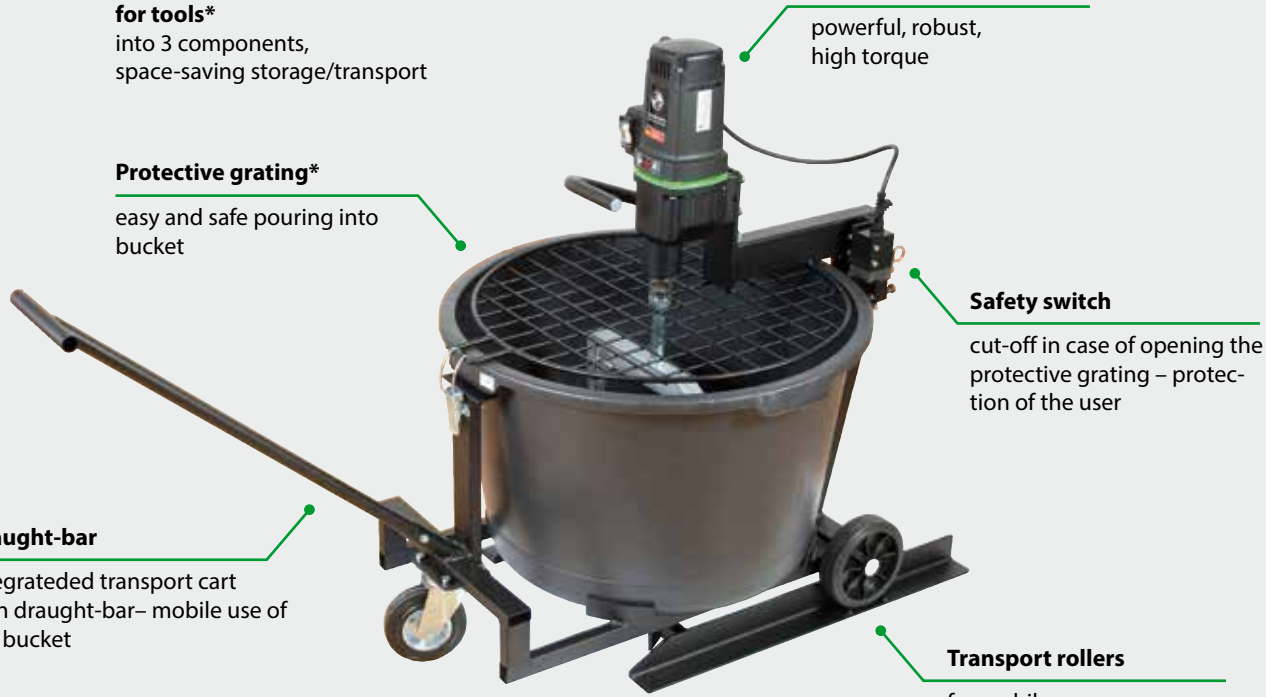

** not present on all models*

FEATURES OF MIXING STATIONS

Our mobile mixing stations offer a compact size and low weight but also maintain high torque. The drive motor can be removed quickly and effortlessly to allow easy transport of the unit whilst also saving space.



Mixing station Automix 1801



50 kg

Mixing station Automix 90



80 kg

The mobile mixing station up to 50 kg

USE:

- Mixing of building materials with middle and high viscosity, e.g. filler and leveling compounds, tile cement, ready-mixed mortar and plaster, screed
- Civil engineering, floor renovators, landscaping

FEATURES:

- Robust universal motor – very high performance
- Dust protected switch
- Mechanical safety clutch
- Integrated transport cart with draught-bar – for mobile use
- Separation of motor and base frame without any tools
- Low weight, compact design – easy to transport and space-saving storage
- Protective grating – easy and safe pouring of bagged material
- Hinged machine arm – easy bucket exchange
- Twist protection for bucket – stable handling

The mobile mixing station up to 80 kg

USE:

- Mixing of building materials with middle and high viscosity, e.g. filler and leveling compounds, tile cement, ready-mixed mortar and plaster, screed
- Civil engineering, floor renovators, landscaping

FEATURES:

- Robust universal motor – very high performance
- Dust protected switch
- Mechanical safety clutch
- Integrated transport cart with draught-bar – for mobile use
- Separation of motor and base frame without any tools
- Space-saving storage
- Safety switch – cut-off in case of opening the protective grating
- Remix operator – pressing a special button enables to continue the mixing operation after the head has been lifted up
- Twist protection for bucket – stable handling

SPECIFICATIONS	AUTOMIX 1801
Power input	1.500 W
Rated voltage	230 V ~
Rated speed	50 rpm
No-load speed	115 rpm
Bucket size	65 l
Spindle connection	M 20 female
Weight	26.5 kg
Order no.	07614000

Supplied in a box incl. mixing paddle and bucket 65 l

ACCESSORY bucket 65 l 32341000

SPECIFICATIONS	AUTOMIX 90
Power input	1500 W
Rated voltage	230 V ~
Rated speed	50 rpm
No-load speed	115 rpm
Bucket size	90 l
Spindle connection	M 20 female
Weight	35.0 kg
Order no.	07617000

Supplied in a box incl. special stirring rod and bucket 90 l

ACCESSORY bucket 90 l 32342000

