






STAIRTEC FSF stair nosing profiles resolve challenges in transitioning from tile flooring to tile stairs. This product range proposes practical, efficient, and durable solutions.

stairtec™ FSF



This is the section for H 5/16" and 3/8" (8 and 10mm).
For H 1/2" (12.5mm) the section is different

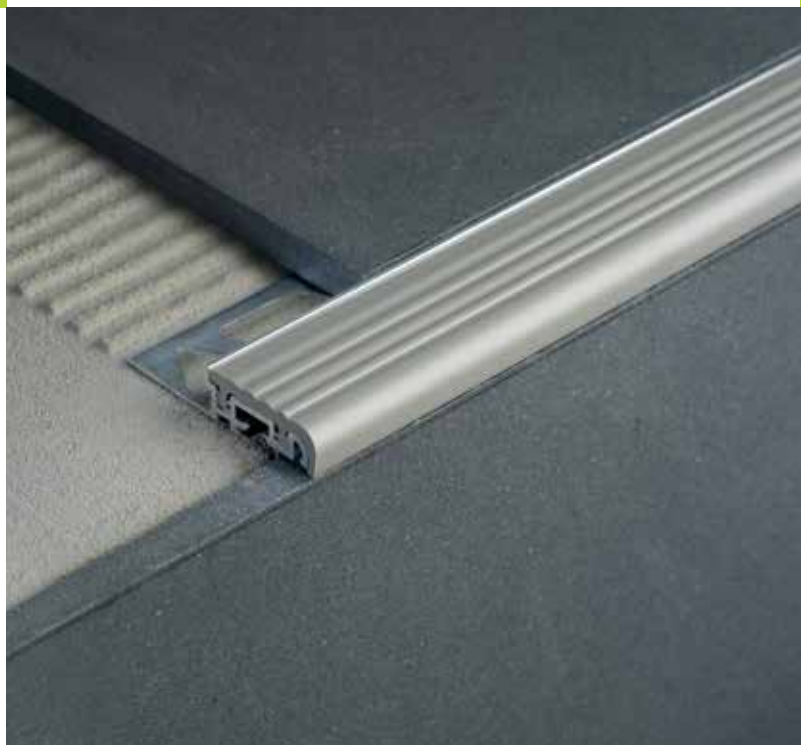

STAIRTEC FSF-A* Aluminum with 1-3/16" (30mm) Thermoplastic Rubber Insert
Aluminum base profile with a replaceable no-slip thermoplastic rubber insert. End caps FST are available for all three profile heights. Replacement no-slip thermoplastic rubber insert: Code FSFI 30 P*.

PLEASE NOTE: thermoplastic rubber insert could be affected by some amount of shrinkage depending on temperature and its variances ((0,2% every 10°C / 50F). The profiles is sold with rubber length exceeding profile length to compensate dimensional changes (the exceeding material can be used also after installation).

	H = in	mm	Art.		Insert Colors	
Material:	5/16	8	FSF	80	A*	23/32/51
Extruded Natural Aluminum	3/8	10	FSF	100	A*	23/32/51
Synthetic Insert	1/2	12.5	FSF	125	A*	23/32/51
Length: 8'10" (2.70meters)						
Width: 1-3/16" (30mm)						
Colors*: Grey (23), Beige (32), Black (51)						

Material:	5/16	8	FST	80	P*	23/32/51
PVC	3/8	10	FST	100	P*	23/32/51
Colors*: Grey (23), Beige (32), Black (51)	1/2	12.5	FST	125	P*	23/32/51

